



Eclipse 5



LED PATH LIGHT

ILLUMINATE YOUR WORLD

Specification Code Example showing how to specify a Eclipse luminaire.



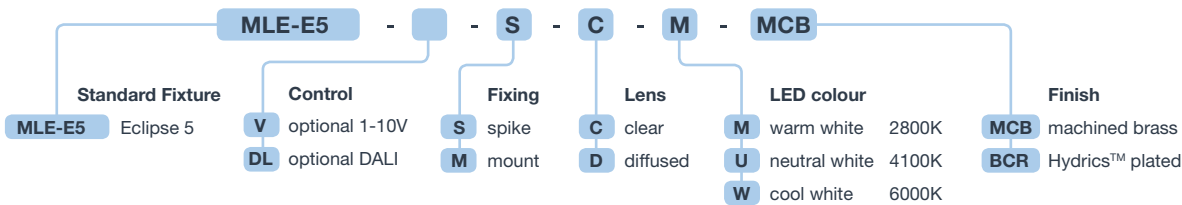


Specifications

IP rating	Ingress Protection - IP67		
Materials & finish	thermally optimised DZR brass optional Hydrics™ plated finish		
Lens	clear or diffused 5mm tempered glass		
Light source	CREE™ MC-E quad chip LED available in		
	warm white 2800K	neutral white 4100K	cool white 6000K
CRI	85 ~ 90	80 ~ 85	75
Luminous intensity	up to 400 lumens. IES photometric files available > 70% lumen maintenance at 50,000 hours		
Efficacy	up to 80 lumens per watt depending on colour temp.		
Power	5 watts total including integral VDi™ driver		
VDi™ driver technology	integral low voltage constant current driver can compensate for voltage drop and fluctuations		
VDi™ thermal intelligence	optimal LED junction temperatures are maintained if the ambient temperature exceeds 50° Celsius		
Control	optional 1-10 volt analogue or DALI digital		
Power supply	Optimo toroidal transformer 25V AC output can power the following number of luminaires : MLE-OT-100 1 - 20 luminaires MLE-OT-200 1 - 40 luminaires		


All dimensions shown are in millimetres (mm)

FINISH OPTIONS

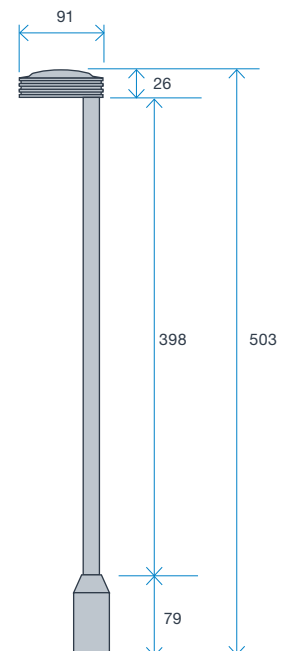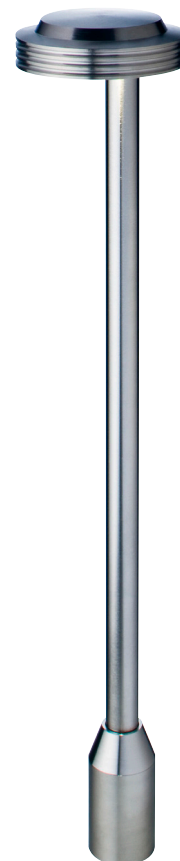


Accessories


MOUNT FIXING **M**



SPIKE FIXING **S**



EXTENSION POST



For the latest information visit - www.megabay.com/eclipse

Specifications are subject to change without notice. CREE™ is a registered trademark of CREE Inc.